











Getting Started: How to unlock the drive

EASY TO USE

YOUR datAshur Personal² SHIPS WITH DEFAULT PIN CODE 1-1-2-2-3-3-4-4

1. *Press KEY Button 	All LEDs    will flash together once and then blink 
2. *Within 10 seconds enter User PIN (factory default PIN 1-1-2-2-3-3-4-4) and press KEY Button 	 solid for approximately 2 seconds and then change to solid 
3. Connect the datAshur Personal ² into USB port within 30 seconds	 remains solid  will flicker and turn to solid
4. datAshur Personal ² can now be accessed as any other storage device	Your computer assigns a new drive letter (e.g. F: or G:)
5. To lock the datAshur Personal ² , save all data and unplug the drive	All indicators will turn off Drive is now locked

*before connecting



iStorage datAshur Personal² is developed and manufactured by iStorage Ltd. and is based on DataLock® technology licensed from ClevX, LLC



Quick Start Guide

Please note:

The datAshur Personal² drive may need to be charged before use for 30-60 minutes by inserting into a powered USB port.

**FOR SECURITY, CHANGE
FACTORY DEFAULT PIN**
SEE OTHER SIDE FOR INSTRUCTIONS



www.istorage-uk.com

85.5mm

54mm

Quick Start Guide shown at actual size

Printing instructions:

This is a tri-fold brochure to be printed on both sides with a finished folded dimensions of 85.5mm x 54.00mm




















WHEN FOLDED THE QSG WILL LOOK LIKE THIS WITH A FINISHED FOLDED DIMENSIONS OF 85.5 mm x 54 mm

How to change User PIN:



CAUTION FOR SECURITY, CHANGE FACTORY DEFAULT PIN

PIN must not be sequential or all the same number e.g. 1-2-3-4-5-6-7 or 3-3-3-3-3-3-3


1. Press KEY Button 	All LEDs    will flash together and then blink 
2. Enter User PIN (factory default PIN 1-1-2-2-3-3-4-4) and press KEY Button 	 solid for approximately 2 seconds and then change to solid 
3. Press KEY Button twice  	 will blink
4. Within 10 seconds enter New User PIN (must be 7 -15 digits) and press KEY Button twice  	 will blink
5. Re-enter New User PIN and press the KEY Button twice  	 will illuminate and then change to solid  if PIN entries matched  solid if PIN entries not matched

Insert datAshur Personal² into USB port



datAshur²
personal
USB3.0

Compatibility

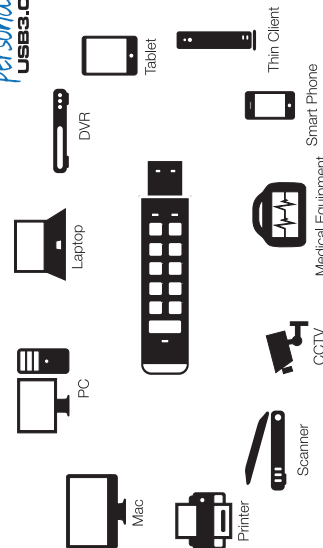

85.5mm

54mm

Compatibility

datAshur²
personal
USB3.0

